





1 ½ BLOCKS FRONT

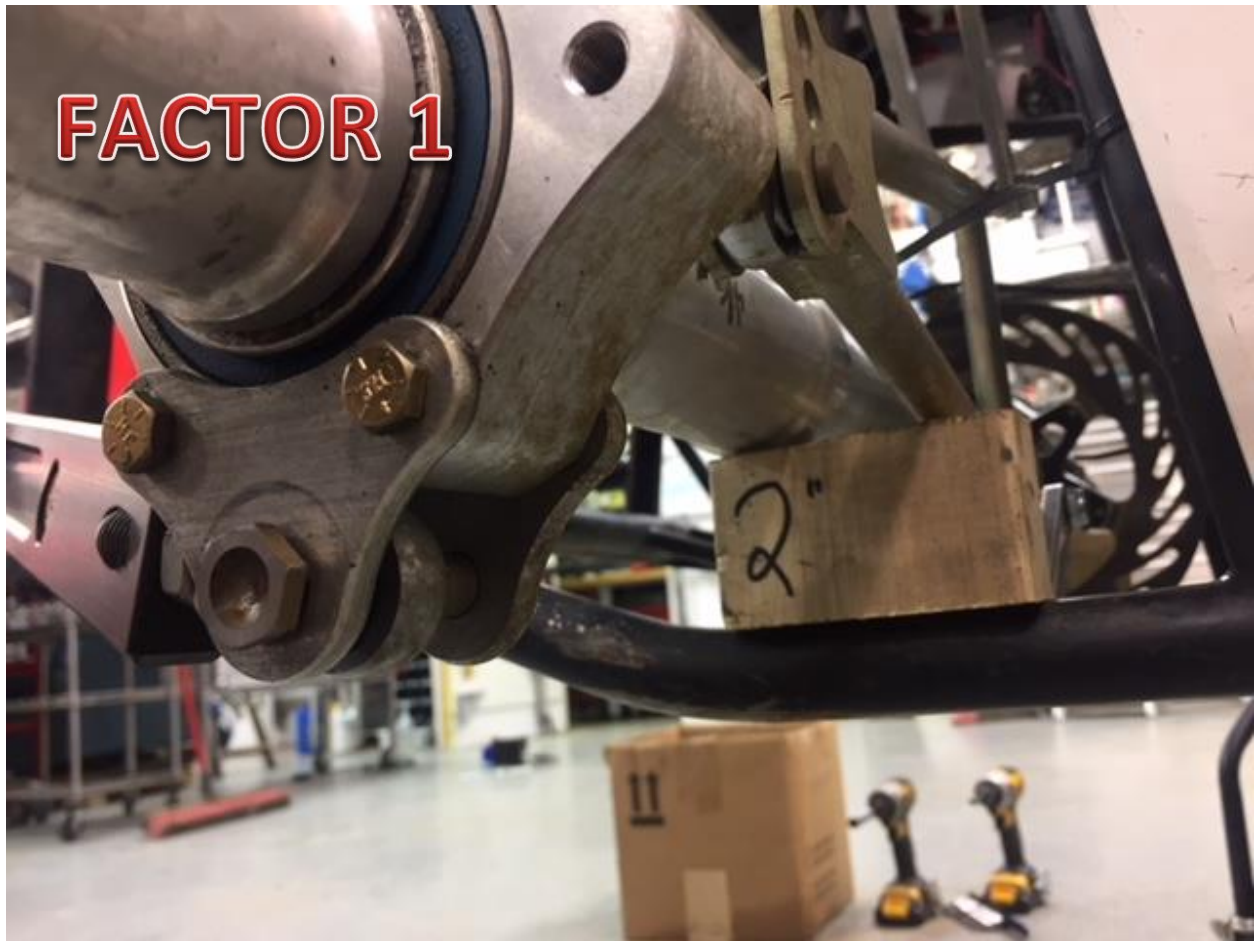

2" BLOCKS REAR

I USE 3 TURNS MORE IN THE 2 LEFT SIDE BLOCKS THAN I DO THE RIGHTS. FOR SET UP

NORMALY 3 IN LF
TOUCH RIGHT FRONT
- 2 RR
+ 1 LR

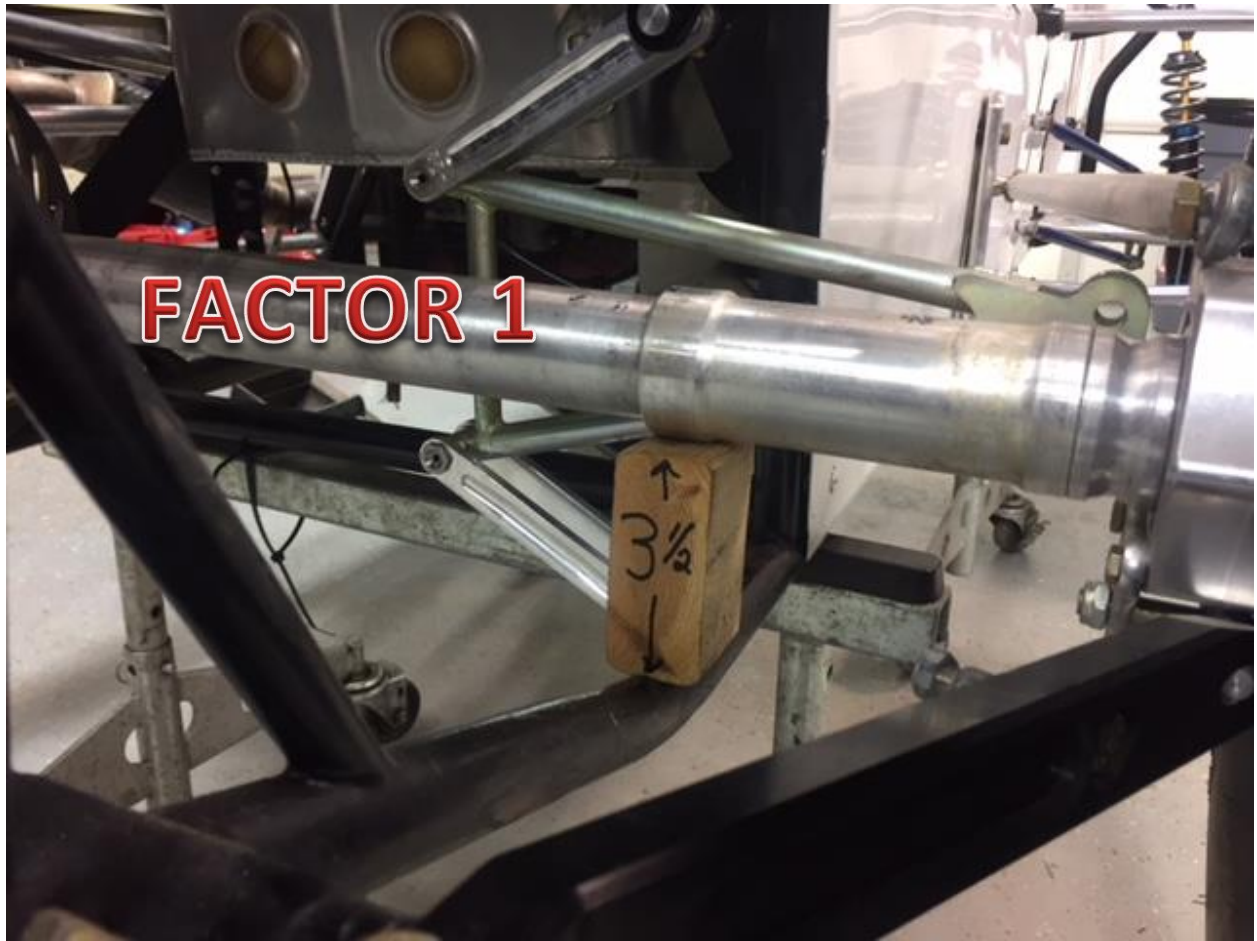

I MAKE SOME RIDE HEIGHT BLOCKS TO PUT UNDER THE AXEL TO SIMULATE DRIVER IN CAR

MINE ARE ACTUALLY .200 DIFFERENCE FROM LEFT TO RIGHT



YOU CAN SEE THE RIDE HEIGHT BLOCK IN PLACE HERE.

I HAVE CUT SOME BLOCKS SO I COULD TAKE REAR TIRES OFF TO MAKE IT EASIER TO SEE

THE USE OF GAGE BLOCKS IS WITH THE DRIVER IN THE CAR – OR EQUAL WEIGHT

RIGHT REAR IS $4 \frac{1}{4}$


LEFT REAR IS $3 \frac{1}{2}$

AND FRONT ARE $\frac{1}{2}$ INCH HIGHER THAN REAR

THESE ARE THE GAGE BLOCKS THAT I USE ON ALL MY CARS



RIGHT FRONT

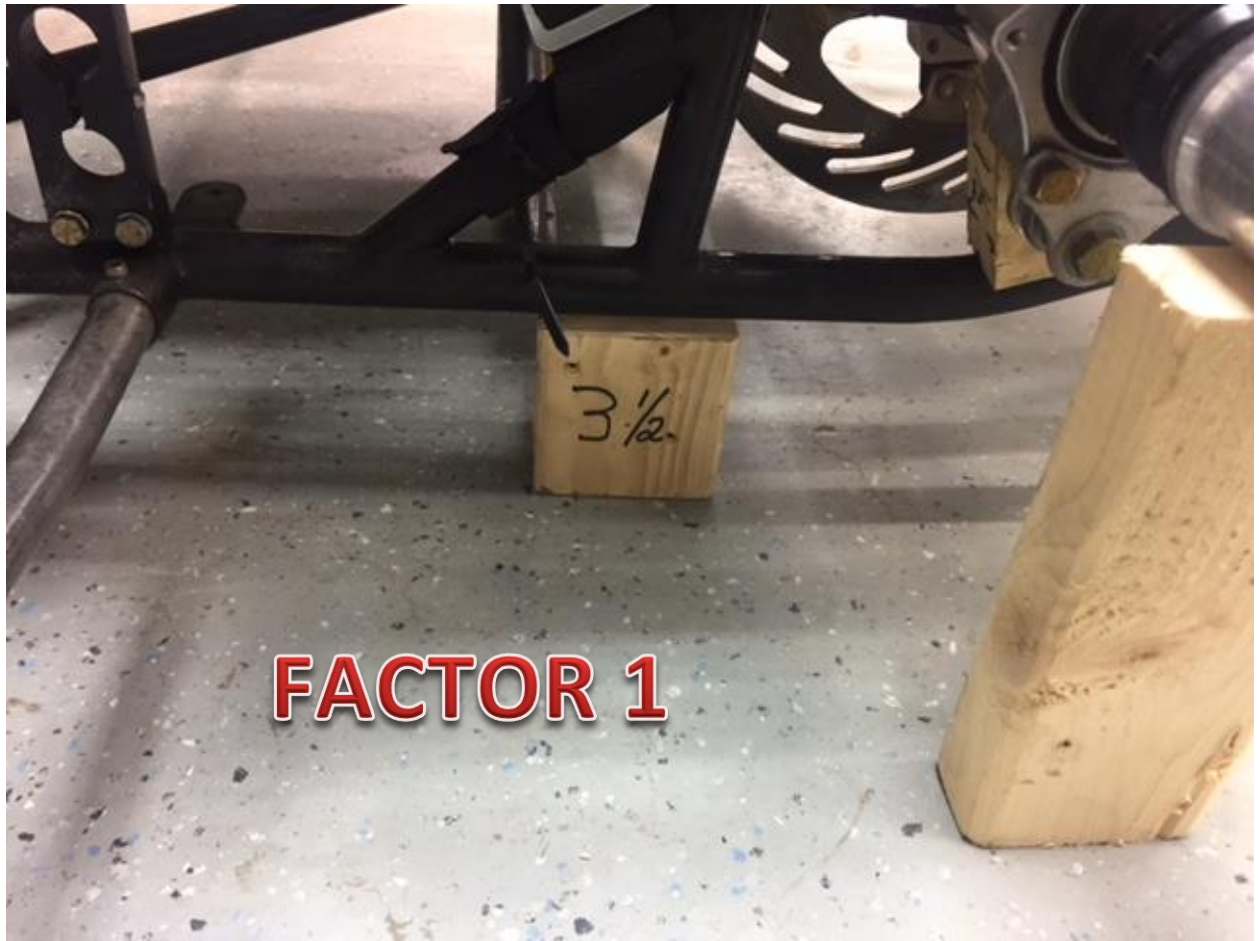

FACTOR 1

